

TECHNICAL DATA SHEET

LASYTD IP65 / Flex Led

VERSION - 30.04.2018

STANDARD LUMINAIRE

Reference	LASYTD
Protection Class	IP65
Lighting Source	Flex Led
Dimensions	120 x 82mm
Standard Length	200 - 530 - 1025 - 1520 - 2015mm
Length on measure	on request up to 2015mm
Nb Lighting Unit	120 LED/m
Voltage	24V
Power	9.6W/m
Connecting Cable	One Side: 1m cable PUR 2x2.5mm ²

FINISH

Color Finishing Profil

Standard	Black Powder Coating
On request	Thermo-enamelling Powder Coating RAL Color Anodising

Glass Finishing

Standard	Clear
On request	Opaline

ON REQUEST

Fixation	LASY BOX
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical department for more information</i>

LIGHTING SOURCE

Lighting Source	Flex Led
Voltage	24V
Power	4.8W/m
Nb Led	60 LED/m - LED Pitch: 16.8mm
Beam Angle	120°
CRI	>80
Cut-Out	every 100mm
Lifetime	50'000h or 5 years
Working T°	-30°C to +75°C


Color Temperature & Luminous Flux / Meter

CCT	2700K	3000K	4000K
lm/m	390 lm	390 lm	425 lm


CERTIFICAT



APPLICATION: walls, recessed ground, passageways

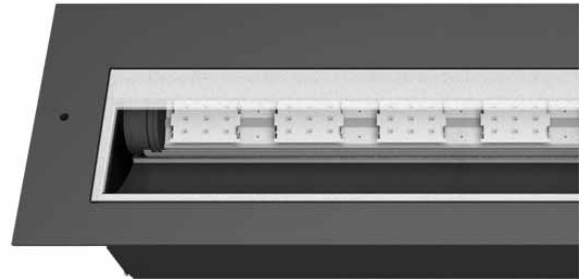


LASYTD / Aga-Led® Type B

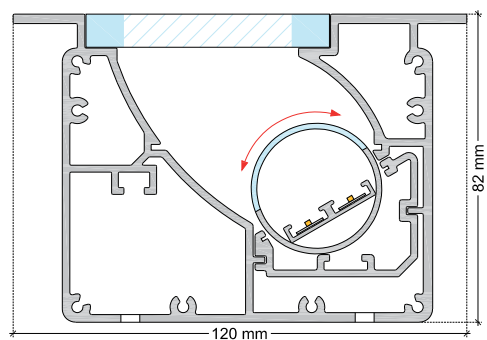


ADVISED INSTALLATION FOR UNIFORM LIGHT OUTPUT

CLEAR GLASS

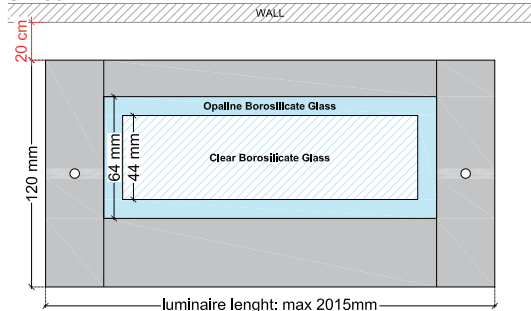

OPALINE GLASS

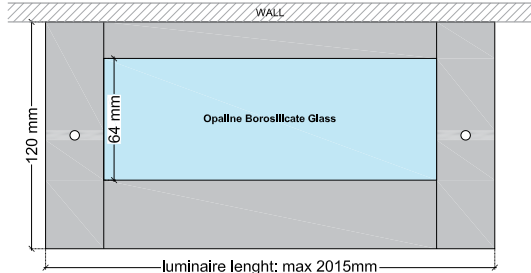

On Request: Connecting Plug

AF/AMS



AF-E/AMS-E (IP68)

