

## TECHNICAL DATA SHEET

### LU3AL IP20 / Aga-Led® Type A

VERSION - 23.03.2016

#### STANDARD LUMINAIRE

|                   |   |
|-------------------|---|
| Reference         | LU3AL   |
| Protection Class  | IP20  |
| Lighting Source   | Aga-Led® Type A                                   |
| Connector         | Rigid Loop on B'Light conductor 16mm <sup>2</sup> |
| Dimensions        | 52 x 30mm   |
| Standard Length   | 330 - 670 - 1000 - 1330 - 1670 - 2000mm           |
| Length on measure | on request up to 3000mm                           |
| Nb Lighting Unit  | 18 LED/m  |
| Voltage           | 24V   |
| Power             | 18 W/m  |
| Connecting Cable  | 1m standard cable 2x1.5mm <sup>2</sup>            |

#### FINISH

##### Color Finishing Profil

|            |   |
|------------|---|
| Standard   | Natural Anodised Aluminium  |
| On request | Thermo-Enameling<br>Powder Coating RAL<br>Color Anodising<br>Polished Aluminium Chrome Aspect<br>Polished Aluminium Gold Aspect |

#### ON REQUEST

|                 |   |
|-----------------|---|
| Fixation        | ABA: Perpendicular Support<br>ABS: 45° upward or downward support         |
| Cover           | VAS: Clear Glass / VOS: Opaline Glass                                     |
| End Caps        | EPA<br>EPAR (for VAS/VOS Cover)   |
| Connecting Plug | AMS / AF  |
| Dimming Option  | 1-10V, Dali, KNX<br><i>Ask technical departement for more information</i> |

#### LIGHTING SOURCE

|                 |                       |
|-----------------|-----------------------|
| Lighting Source | Aga-Led® Type A       |
| Ref             | A10                   |
| Voltage         | 24V                   |
| Power           | 1W                    |
| Beam Angle      | 15°                   |
| CRI             | 80                    |
| Lifetime        | 60'000h               |
| Working T°      | -30°C ~ +55°C         |
| Option          | AGC: Anti Glare Optic |




#### Color Temperature & Luminous Flux / Unit

|                    |       |       |
|--------------------|-------|-------|
| CCT                | 2800K | 4000K |
| Luminous Flux/Unit | 40 lm | 45 lm |

#### CERTIFICAT



#### LU3AL / AGA-LED® TYPE A - Rigid Loop

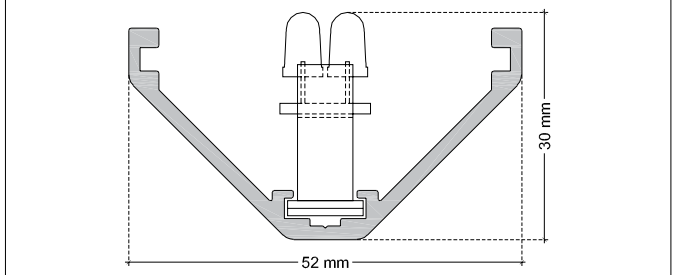

#### ON REQUEST: LU3SAL Fixation - NOT POSSIBLE WITH COVER

ABA




ABS



#### ON REQUEST: LU3AL Cover

VAS/VOS

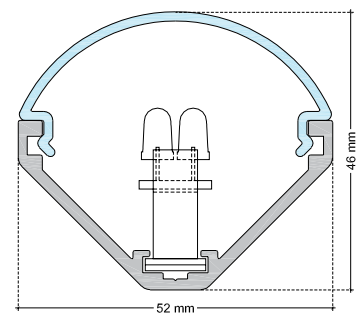


#### ON REQUEST: LU3AL End Caps

EPA



EPAR fot VAS/VOS Cover



#### ON REQUEST : Connecting Plug AF/AMS

