

TECHNICAL DATA SHEET

LU3SAL IP20 / Aga-Led® Type B

VERSION - 13.12.2016

STANDARD LUMINAIRE

Reference	LU3SAL
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	52 x 28mm
Standard Length	330 - 670 - 1000 - 1330 - 1670 - 2000mm
Length on measure	on request up to 3000mm
Nb Lighting Unit	18 LED/m
Voltage	24V
Power	17.28W/m to 21.60 W/m
Connecting Cable	1m standard cable 2x1.5mm ²

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling
	Powder Coating RAL
	Color Anodising
	Polished Aluminium Chrome Aspect
	Polished Aluminium Gold Aspect

ON REQUEST

Fixation	ABA: Perpendicular Support ABS: 45° upward or downward support
Cover	VAS: Clear Glass / VOS: Opaline Glass VAU: Clear Glass / VOU: Opaline Glass
End Caps	EPA EPAR (for VAS/VOS Cover)
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	


Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm


CERTIFICAT



APPLICATION: cornices, walls, front lighting

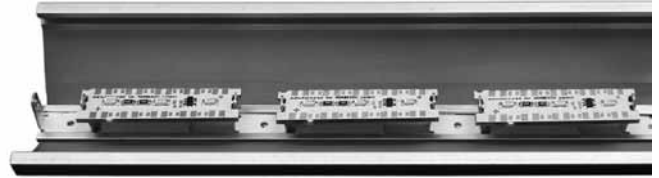

LU3SAL / AGA-LED® TYPE B - Festoon

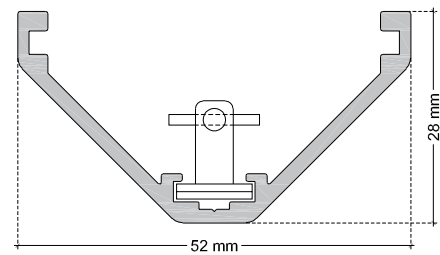

ON REQUEST: LU3SAL Fixation - NOT POSSIBLE WITH COVER

ABA




ABS




ON REQUEST: LU3SAL Cover

VAS/VOS

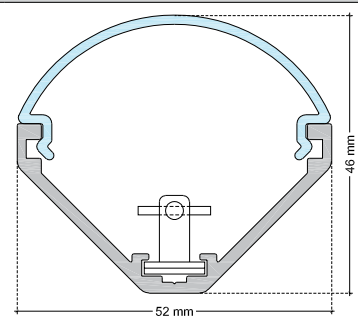

VAU/VOU

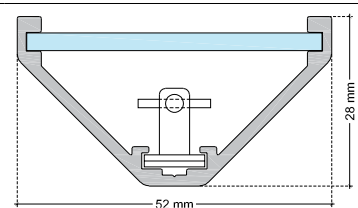

ON REQUEST: LU3SAL End Caps

EPA



EPAR fot VAS/VOS Cover

