

TECHNICAL DATA SHEET

LAVTSAL IP20 / Aga-Led® Type B

VERSION - 05.01.2017

STANDARD LUMINAIRE

Reference	LAVTSAL
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	340 x 208mm
Standard Length	670 - 1000mm
Length on measure	up to 3035mm
Nb Lighting Source	16 LED/m
Voltage	24V
Power	15.36W/m to 19.2W/m
Connecting Cable	Both tige : 1m standard cable 2x1.5mm ²
Fixation	2 x (TIGE-8mm + BFTV-8mm)/m + Plexiglass
End Caps	EAV
Anti Glare Visor	VAE

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-enameling
	Powder Coating RAL
	Color Anodising
	Polished Aluminium Chrome Aspect
	Polished Aluminium Old Gold Aspect

ON REQUEST

Fixation	BFTV-8mm
	ALTR - Power Supply included
Cover	Wood Line
Dimming Option	1-10V, Dali, KNX
	Ask technical departement for more information

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Voltage	24V	24V
Power	0.96W	1.2W
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

Color Température & Luminous Flux / Unit


	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

CERTIFICAT




Application: Picture Lighting

LAVTSAL - Aga Led Type B

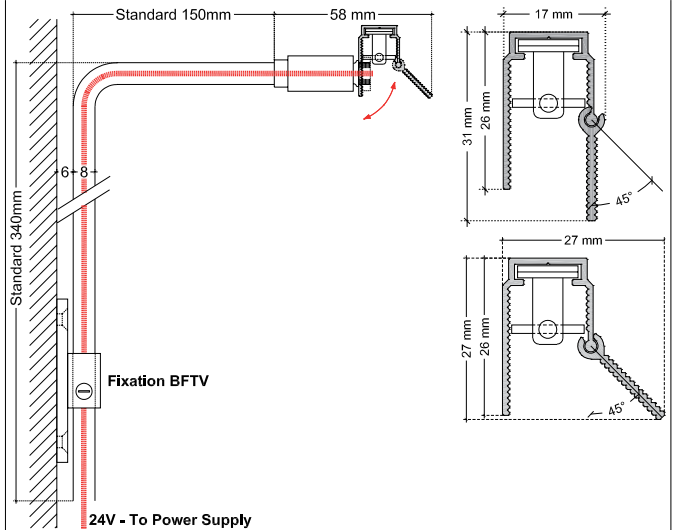

FIXATION - (Detail A)

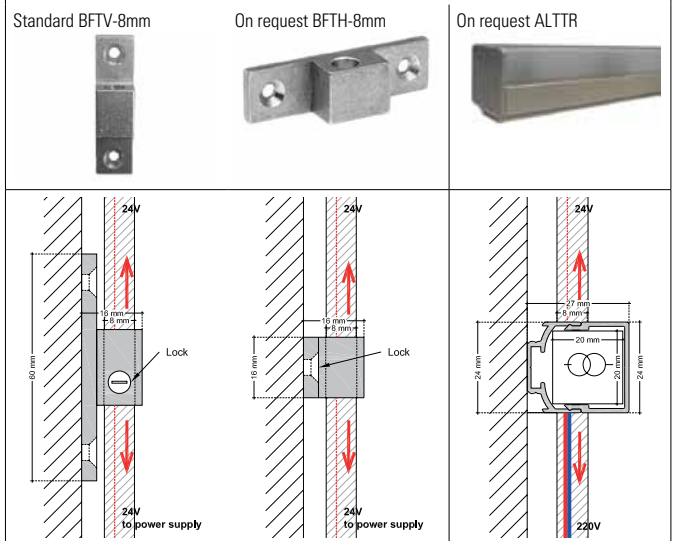

ON REQUEST: COVER - WOOD LINE

