

## TECHNICAL DATA SHEET

### ADJUSTABLE SYSTEM WITH LINEAR SPOTS IP20/ Aga-Led® Type A10

VERSION - 10.02.2016

#### STANDARD LUMINAIRE

Reference	LAVTSAL
Protection Class	IP20
Lighting Source	Aga-Led® Type A10
Connector	Festoon on B'Light conductor 16mm <sup>2</sup>
Dimensions	30 x 58mm
Lenght on measure	on request up to 2000
Nb Lighting Unit	on measure
Voltage	24V
Power	1W / unit
Connecting Cable	1m standard cable 2x0.75mm <sup>2</sup>

#### FINISH

##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome or Old Gold Aspect

#### ON REQUEST

Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>
----------------	---


#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type A
Ref	A10
Voltage	24V
Power	1W
Beam Angle	15°
CRI	80
Light Output	lm/Unit
	2800K 40lm
	4000K 45lm
Lifetime	60'000h
Working T°	-30°C ~ +55°C
Option	AGC: Anti Glare Optic


#### CERTIFICAT




#### APPLICATION: Art objects, private collections, museums

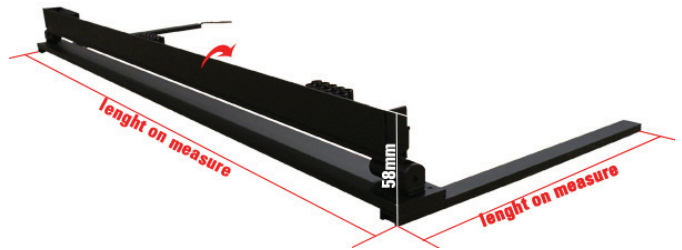

#### LINEAR SPOT LIGHT / AGA-LED® A10 - Festoon

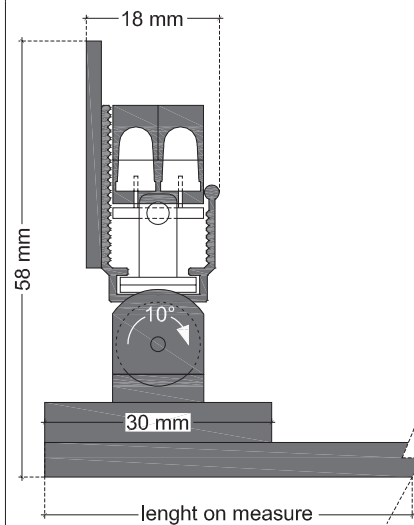

#### AGA-LED A10 + AGC

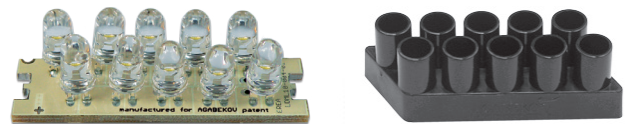

#### EXAMPLE OF REALISATION



Geneva, Private Collection